


# Using the AquaBead Bead Agitator

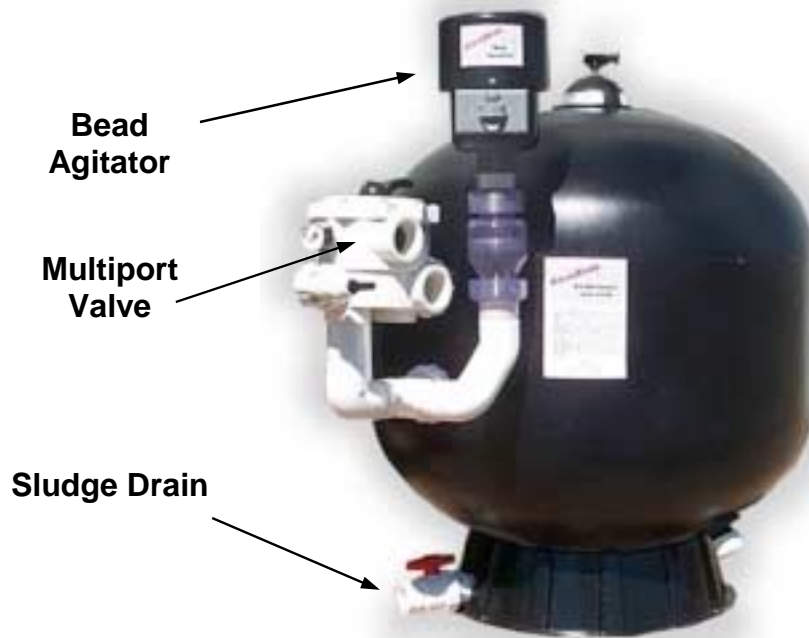

Using the AquaBead Bead Agitator is a snap

1. You will normally only be using the Agitator prior to backwash, so let's start by opening the Sludge Drain, with the water pump running, for a few seconds to blow any accumulated debris out of the filter.
2. Remember that we will never be running the water pump while running the Bead Agitator. So, Turn off the water pump.
3. Move the Multiport valve to the "RINSE" position.
4. The Bead Agitator is equipped with an on/off switch. Turn it on and allow to run for 1 to 3 minutes. What is happening now is the Agitator is forcing large amounts of air into the bottom of the vessel and as the air is rising it is breaking apart the bead pac and accumulated debris. Once the Agitator has broken everything free, it is time to turn off the Agitator.
5. You may now go into the rest of your backwash cycle. Move the multiport valve to the "BACKWASH" position and turn on water pump and run until water is clear in sight glass. Normally 1 to 3 minutes. Stop pump.
6. Put multiport valve in "RINSE" position and run for a short time until water is clear in sight glass. Stop pump.
7. Return the multiport valve to the "FILTER" position and resume water pump.
8. That's it your done.

Need Help? Feel free to call our Toll Free Customer Support Line  
1-888-766-3691